


PROTECTGLOBAL.COM

REPLACEMENT  
INSTRUCTIONS  
FOR THE  
QUMULUS<sup>®</sup>  
FLUID BAG  
(Version 2.0)



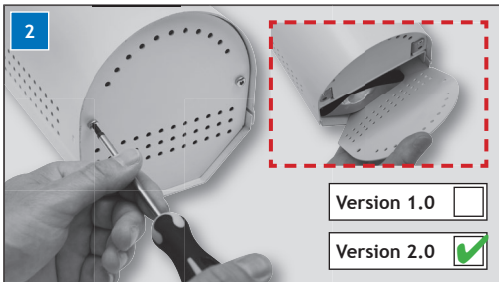
SECURED IN SECONDS

1

**ATTENTION!**

**IMPORTANT:** Turn off power supply of the QUMULUS!  
**DON'T TOUCH!** Cool down for at least one hour.

2

Version 1.0 Version 2.0 

Remove the two screws and remove the metal plate in the bottom of the fog cannon. Remove empty fluid bag if any.

3



Connect the fluid tube and the level indicator cable to the new fluid bag. Push the bag upwards into the machine. The spout must turn upwards to the right. Now screw the metal plate back again.

**PROTECT**<sup>®</sup>



*Scan the code with a smartphone to watch how to replace the fluid bag.*

# INFO

Visit [WWW.PROTECTGLOBAL.COM](http://WWW.PROTECTGLOBAL.COM) to find information about the distributor in your country.

**PROTECT A/S**

Hasselager Centervej 5 · DK-8260 Viby J · Tel.: (+45) 86 72 18 81  
[info@protectglobal.com](mailto:info@protectglobal.com) · [protectglobal.com](http://protectglobal.com)